


Data Surge Protector SPD THUNDERBOLT Outdoor Gigabit Ethernet/ PoE++ Shielded RJ45 SASD, GDT CE Compliant, with Ground Kit



1101-1080
TB GbE/PoE CD

Features

- Models for All Common Ethernet/PoE Protocols
- Ground Screws for Dual Lug
- IP67 When Provided Strain Reliefs Installed
- Two IP67 Strain Reliefs Included
- Bulkhead Mount
- Pole Mount Kit 9100-0521

Applications

- Gigabit Ethernet/PoE++ Networks
- Telecommunications Base Stations
- WISP/ISP
- IT & Data Centers
- Point-to-Point Links
- Control Lines and Sense Loops
- Oil & Gas

Description


Data surge protector (also known as SPD or lightning protector) 1101-1080 from Transtector is an outdoor style SPD that utilizes state of the art SASD/GDT technology to protect critical equipment in Gigabit Ethernet/PoE++ protocol data networks while remaining transparent to data throughput. This surge protector provides effective protection against electrical transient surges that are generated both by external lightning events and by internal switching events and supports long-term system reliability by absorbing high amounts of transient energy while maintaining a very low clamping voltage. Transtector Data Signal surge protectors are available in stock with same day shipping.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|------------------------------|---------|-------|
| Connectors | | Shielded RJ45 | | |
| Compatible Cables | | Cat5/5e UTP/STP, Cat6/6A STP | | |
| Data Protocols | | Gigabit Ethernet/PoE++ | | |
| Data Rate | | | 1,000 | Mb/s |
| Series Impedance (Data) | | | 1 | Ohms |
| Capacitance (Common) | | | 15 | pF |
| Power over Ethernet Protocols | | PoE | | |
| Vdc Rating (Data) | | 48 | 60 | Vdc |
| PoE Power | | | 100 | W |
| PoE Current Per Pin | | | 750 | mA |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[Data Surge Protector SPD THUNDERBOLT Outdoor Gigabit Ethernet/PoE++ Shielded RJ45 SASD, GDT CE Compliant, with Ground Kit 1101-1080](#)

Data Surge Protector SPD THUNDERBOLT Outdoor Gigabit Ethernet/
PoE++ Shielded RJ45 SASD, GDT CE Compliant, with Ground Kit



1101-1080
TB GbE/PoE CD

Surge Protection Specification

| Description | Minimum | Typical | Maximum | Units |
|-----------------------------|---------|----------------------------|---------|-------|
| Surge Protection Technology | | SASD, GDT | | |
| Protected Pins | | [1,2], [3,6], [4,5], [7,8] | | |
| Protection Modes | | L-G | | |
| 10/1000µs Surge Current | | | | |
| L-G | | | 100 | A |
| 8/20µs Surge Current | | | | |
| L-G | | | 5 | kA |
| Response Time | | | 5 | ns |

Mechanical Specifications

Size

| | | |
|--------|---------|-------------|
| Height | 1.41 in | [35.81 mm] |
| Width | 1.41 in | [35.81 mm] |
| Depth | 3.97 in | [100.84 mm] |
| Weight | 1.5 lbs | [680.39 g] |

Environmental Specifications

| | |
|---------------------------------|---|
| Operating Temperature | -40 to +85 deg C |
| Storage Temperature | -40 to +85 deg C |
| Environmental Protection Rating | IP67 |
| Mount Type | Bulkhead |
| Installation Hardware | Strain Relief, Shroud Gasket, M29 Nut, M29 Flat Washer, Bulkhead Gasket, Ground Screw |
| Grounding | 10-32 x 1/4 PH Screw, 16mm ² Wire, Ring Terminal, 2 Hole Lug |


Compliance Certifications

| | |
|----------------|------------|
| RoHS Compliant | Yes |
| CE Compliant | Yes |
| Certifications | CE 60950-1 |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[Data Surge Protector SPD THUNDERBOLT Outdoor Gigabit Ethernet/PoE++ Shielded RJ45 SASD, GDT CE Compliant, with Ground Kit 1101-1080](#)

Data Surge Protector SPD THUNDERBOLT Outdoor Gigabit Ethernet/
PoE++ Shielded RJ45 SASD, GDT CE Compliant, with Ground Kit

1101-1080
TB GbE/PoE CD



Transtector Systems specializes in protection of highly sensitive, low voltage equipment through its patented, non-degrading silicon diode technology and custom filters. Our power quality expertise translates into a diverse product offering including AC, DC, and signal applications as well as integrated cabinets, power distribution panels and EMP hardened devices.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Data Surge Protector SPD THUNDERBOLT Outdoor Gigabit Ethernet/PoE++ Shielded RJ45 SASD, GDT CE Compliant, with Ground Kit 1101-1080](#)


URL: <https://www.transtector.com/data-surge-protector-spd-thunderbolt-outdoor-gigabit-1101-1080-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Transtector reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Transtector does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Transtector does not assume any liability arising out of the use of any part or documentation.

Data Surge Protector SPD THUNDERBOLT Outdoor Gigabit Ethernet/
PoE++ Shielded RJ45 SASD, GDT CE Compliant, with Ground Kit


1101-1080 CAD Drawing

| REVISIONS | | |
|-----------|-----------------|-----------------|
| REV. | DESCRIPTION | DATE |
| A | INITIAL RELEASE | 1/17/19 |
| | | APPROVED DWR |

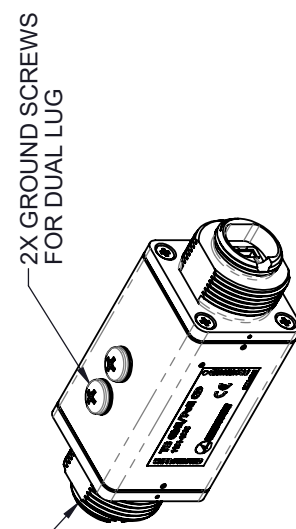


2X BULKHEAD MOUNT CONNECTORS WITH PROVISIONS FOR IP67 STRAIN RELIEF

2X GROUND SCREWS FOR DUAL LUG

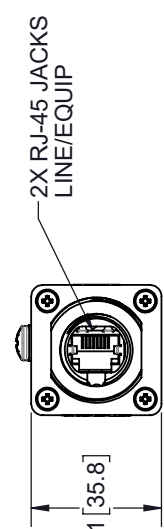


2X RJ-45 JACKS LINE/EQUIP

1.41 [35.8]

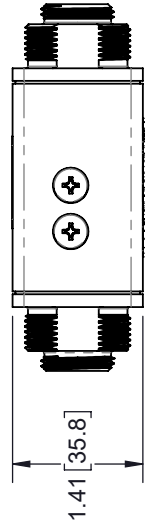

1.41 [35.8]

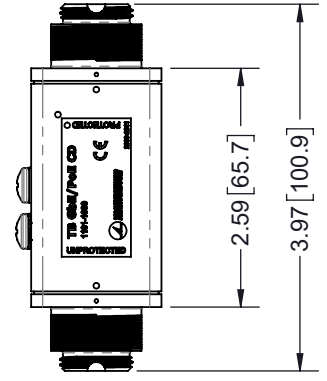


2.59 [65.7]

3.97 [100.9]

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
 .X±.2 [5.08] FRACTIONS ±.132
 XX±.01 [.25] ANGLES ±1°
 XXX±.005 [.13]

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.
 THIRD-ANGLE PROJECTION



THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF TRANSTECTOR CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1
SCALE 1:2

TRANSTECTOR

10701 AIRPORT ROAD, HAYDEN, ID, 83835
 PHONE: 1.208.635.6400 | 1.800.882.9110
 FAX: 1.208.955.2041
 www.transtector.com | e-mail: sales@transtector.com

SIZE CAGE DRAWN BY PART NUMBER
 A 30992 HMB 1101-1080
 REV A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.