



PHANTOM ELITE® ANTENNA IS IDEAL FOR CELL, GSM, PCE, WIFI, 802.11 AND BLUETOOTH WIRELESS APPLICATIONS

Laird Technologies' unique patented Phantom Elite® is a tough low-profile antenna for outdoor or indoor applications. Measuring only 2.7" tall, the Phantom Elite 800 MHz to 5.8 GHz antenna models' revolutionary design features field diversity with both vertical and horizontal polarization components. This gives the antenna diversity, frequency agility, low visibility, wide bandwidth and a low angle radiation pattern that is superior to traditional gain antennas in most applications.

The industry standard NMO mounting socket mates with all Laird Technologies' magnetic, trunk lid, and hole mounts. A threaded permanent stud mount model is also available for vandal resistant mounting on brackets, panels, ceilings or any other kind of housing.

The Phantom Elite® patented technology is beneficial when high performance is desired and extreme ruggedness and low profile is required.


FEATURES 

- True Field Diversity design ensures uninterrupted transmissions in urban canyons and rural drop off areas
- Phantom® outperforms a 3dB whip in many applications
- U.S. Patent Nos. 5,977,931 – 6,292,156 and 7,209,096


MARKETS

- Cell
- GSM and PCS
- WiFi
- 802.11
- Bluetooth wireless applications

ANTENNA PATTERNS

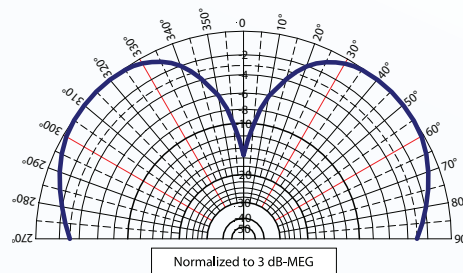

Elevation Pattern (Y, Z, or H-plane)

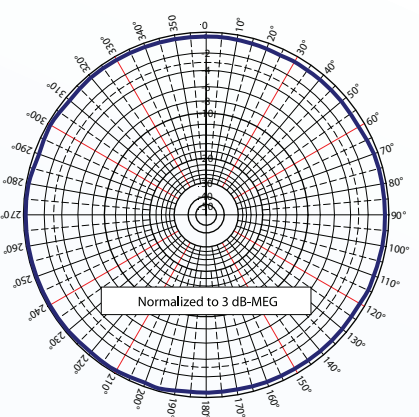

Azimuth Pattern (X,Y, or E-plane)

global solutions: local support™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

SPECIFICATIONS

ELECTRICAL	
VSWR	< 2.1
Nominal Gain	3 dB-M.E.G.
Maximum Power	100 W
Nominal Impedance	50 Ω
Polarization	Vertical & Horizontal
Pattern	Omnidirectional
Half-Power Beamwidth (Elevation° x Azimuth°)	130° x 360°
Coaxial Cable Length & Type	None
Terminations	NMO Socket or, type N-female

MECHANICAL

Color	Black or White
Height (initially)	2¾"
Diameter	1.438"
Weight	0.15 lb
Material	ABS
Mounting Information	NMO (PN: MB8, MAB8) Sold Separately
Noise Suppressor	BlackHawk NS1535 1-35 VOLT, 15 Amp Noise Suppressor (Sold Separately)

Permanent Mounting Option:

Please order by antenna model and insert letter "P" to indicate permanent mounting option (ETRA8063P).

MODEL AND ORDERING INFORMATION

MODEL	DESCRIPTION
ETRA8063	806-870 MHz 3 dB-MEG Phantom Elite® ¾ NMO, White Radome
ETRA8213	821-896 MHz 3 dB-MEG Phantom Elite® ¾ NMO, White Radome
ETRA8903	890-960 MHz 3 dB-MEG Phantom Elite® ¾ NMO, White Radome
ETRA9023	902-928 MHz 3 dB-MEG Phantom Elite® ¾ NMO, White Radome
ETRA18503	1.85 - 1.99 GHz 3dB-MEG Phantom Elite® ¾ NMO, White Radome
ETRA24003	2.4 – 2.5 GHz 3 dB-MEG Phantom Elite® ¾ NMO, White Radome
ETRA58003	4.9 – 6.0 GHz 3 dB-MEG Phantom Elite® ¾ NMO, White Radome
TRADCAGP	G - Drop ceiling antenna adaptor for P-mount Phantom w/ 6"x6"x0.016" ground plane
Sealtube3	Heat shrink tubing 3"x1"DIA Elite install (use for jaw protector on installation wrench)

Add "B" to model number for black radome. Example: ETRAB8063

Add "P" to model number for Permanent Mount. Example: ETRA8063P